

## Power Supplies

▶▶▶ DR-120-24 *NEW*  
DR-120-48 *NEW*



### Specifications

Models	DR-120-24	DR-120-48
<b>Input</b>		
Range	88 AC ~ 264 AC	
Frequency	47 Hz ~ 63 Hz	
<b>Output</b>		
Power	24 Vdc/5.0 A max., 120 W	48 Vdc/2.5 A max., 120 W
<b>Mechanical</b>		
Dimensions (W x H x D)	65 mm x 125 mm x 100 mm	
Installation	DIN-Rail Mounting	
<b>Environmental</b>		
Operating Temperature	-10 °C ~ +60 °C	
Storage Temperature	-20 °C ~ +85 °C	-25 °C ~ +85 °C



DR-120-48 DR-120-24

▶▶▶ MDR-20-24 *NEW*  
MDR-60-24 *NEW*  
MDR-60-48 *NEW*



### Specifications

Models	MDR-20-24	MDR-60-24	MDR-60-48
<b>Input</b>			
Range	100 AC ~ 250 AC		
Frequency	50 Hz ~ 60 Hz		
<b>Output</b>			
Power	24 Vdc/1 A max., 24 W	24 Vdc/2.5 A max., 60 W	48 Vdc/1.25 A max., 60 W
<b>Mechanical</b>			
Dimensions (W x H x D)	22.5 mm x 90 mm x 100 mm	40 mm x 90 mm x 100 mm	40 mm x 90 mm x 100 mm
Installation	DIN-Rail Mounting		
<b>Environmental</b>			
Operating Temperature	-20 °C ~ +70 °C		
Storage Temperature	-20 °C ~ +85 °C		



MDR-60-24/  
MDR-60-48 MDR-20-24

▶▶▶ KA-52F/DIN-KA52F *NEW*  
KA52F-48/DIN-KA52F-48 *NEW*



### Specifications

Models	KA-52F	DIN-KA52F	KA-52F-48	DIN-KA52F-48
<b>Input</b>				
Range	100 AC ~ 250 AC			
Frequency	50 Hz ~ 60 Hz			
<b>Output</b>				
Power	24 Vdc/1.04 A max., 25 W		48 Vdc/0.52 A max., 25 W	
<b>Mechanical</b>				
Dimensions (W x H x D, Unit: mm)	54 x 36 x 93	68 x 50 x 107	54 x 36 x 93	68 x 50 x 107
Installation	No-mounting	DIN-Rail Mounting	No-mounting	DIN-Rail Mounting
<b>Environmental</b>				
Operating Temperature	0 °C ~ +50 °C			
Storage Temperature	-20 °C ~ +85 °C			



KA-52F/KA-52F-48



DIN-KA52F/DIN-KA52F-48

▶▶▶ **GPSU06U-6** *NEW*  
**GPSU06E-6** *NEW*



**Specifications**

Input	
Range	100 VAC ~ 240 VAC OR 127 VDC ~ 370 VDC
Frequency	50 Hz ~ 60 Hz
Output	
Power	24 VDC/0.25 A max., 6 W
Mechanical	
Dimensions (W x H x D)	32 mm x 66 mm x 68 mm
Installation	No-mounting
Environmental	
Operating Temperature	0 °C ~ +40 °C
Storage Temperature	-20 °C ~ +85 °C



GPSU06U-6



GPSU06E-6  
(2 pole EURO plug)

**Stainless 35 mm DIN-Rail**

▶▶▶ **DRS-125**  
**DRS-240**  
**DRS-360**



DRS-125



DRS-240



DRS-360


<b>Material</b>	stainless sos304-1.0t
-----------------	-----------------------

**Ordering Information**

DRS-125	125 mm length, Stainless 35 mm DIN-Rail
DRS-240	240 mm length, Stainless 35 mm DIN-Rail
DRS-360	360 mm length, Stainless 35 mm DIN-Rail

**19" Rack Mounting Kit 3U**

▶▶▶ **RK-3UD-R**

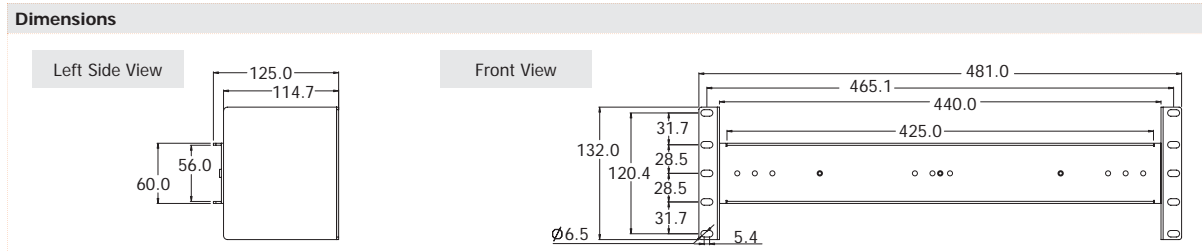




**Ordering Information**

RK-3UD-R	19" Rack Mounting Kit 3U
----------	--------------------------

## Cable

### ▶▶▶ CA-090510

#### Pin Assignments

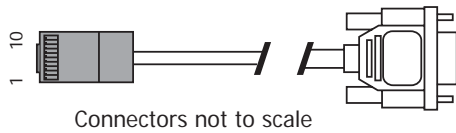

#### RJ-45 8-Pin to DB-9 cable

The wiring diagram for a CA-090510 cable is shown in Table.

RJ-45		DB-9
Pin 1	↔	Pin 6
Pin 2	↔	Pin 7
Pin 3	↔	Pin 5
Pin 4	↔	Pin 2
Pin 5	↔	Pin 3



#### Ordering Information

CA-090510	9-Pin Female D-Sub & RJ-45 Cable, 1 m
-----------	---------------------------------------

## Industrial Enclosures

### ▶▶▶ I-950-ENC I-951-ENC



#### Specifications

Models	I-950-ENC	I-951-ENC
<b>Includes</b>		
Case Accessory		
2 x Polyamide cable glands		
4 x captive lid screws		
1 x DIN-Rail Mounting (20 cm)		
<b>Mechanical</b>		
<b>Casing</b>	Plastic	
<b>Dimensions (W x H x D)</b>	254 mm x 180 mm x 90 mm	254 mm x 180 mm x 111 mm
<b>Environmental</b>		
<b>Temperature</b>	0 °C ~ +50 °C for Protection rating IP66	



I-950-ENC



I-951-ENC

#### Ordering Information

I-950-ENC CR	Industrial Enclosure (254 mm x 180 mm x 90 mm) (RoHS)
I-951-ENC CR	Industrial Enclosure (254 mm x 180 mm x 111 mm) (RoHS)

### ▶▶▶ I-3625-ENC



#### Specifications

<b>Includes</b>		
Case Accessory		
2 x Polyamide cable glands		
6 x captive lid screws		
1 x DIN-Rail Mounting (35.8 cm)		
<b>Mechanical</b>		
<b>Casing</b>	Plastic	
<b>Dimensions (W x H x D)</b>	360 mm x 254 mm x 165 mm	
<b>Environmental</b>		
<b>Temperature</b>	0 °C ~ +50 °C for Protection rating IP66	



I-3625-ENC

#### Ordering Information

I-3625-ENC CR	Industrial Enclosure (RoHS)
---------------	-----------------------------