

**TECHNICAL SPECIFICATION KEYBOARD**

Number of keys:	102 + 2 Mousebuttons
Keyswitch technology:	gold-on-gold domes
Actuation force:	1.0 N
Actuation travel:	0.55 mm
Keyswitch lifetime:	ca. 1 mill. operations
Protection class (max):	IP68
Mounting type:	desktop
Material (surface):	silicone
Material (bottom panel):	plastic
Interface:	PS/2; USB

PROPERTIES

Weight:	800 g
Cable length:	ca. 1.80 m
Operating temp. range:	0 °C bis +70 °C
Storage temp. range:	-25 °C bis +80 °C

TECHNICAL SPECIFICATION TOUCHPAD


Operating principle:	capacitive
Resolution:	max. 500 dpi
Dimension:	65 x 59 mm
Sensing area:	59 x 42 mm

DIMENSION KEYBOARD

Length:	340.0 mm
Width:	165.0 mm
Height:	16.3 mm

FEATURES

- Rear side equipped for VESA mount (75 x 75 mm) with „push-out“ insert nuts for installing bolts
- Key for switching „off“ the keyboard during a cleaning process

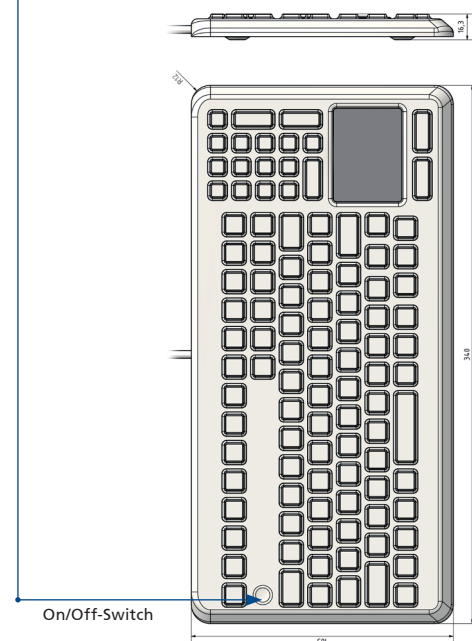

Order info:		Interface		Layout	
Cat.-No.	Product name	PS/2	USB	DE	US
KG17223	TKG-104-TOUCH-IP68-GREY-PS/2-DE	•		•	
KG17224	TKG-104-TOUCH-IP68-GREY-PS/2-US	•			•
KG17201	TKG-104-TOUCH-IP68-GREY-USB-DE		•	•	
KG17202	TKG-104-TOUCH-IP68-GREY-USB-US		•		•
Other language versions / interfaces / configurations available on request.					

