



Features and benefits:

- Integrated 38 mm industrial trackball
- Highly reliable OMRON mechanical switches
- Positive tactile feedback and key embossing
- PS/2 and USB compatible
- Suitable for use 19 inch 1U drawer units
- Panel mount version with reverse side screwing studs
- Rugged construction for reliable functionality
- Chemical, abrasion and scratch resistant frontsheet
- > IP65 (NEMA 4x) sealing
- > 3 million operations per key
- Activation force 2.6 N, key travel 0,3 mm


Specification Keyboard

Number of Keys:	105
Keyswitch Technology:	short travel keys
Actuation Force/ -Travel:	2.6 N / 0.3 mm
Keyswitch Lifetime:	3 mil. operations
Protection Level:	IP65, NEMA 4x (frontside)
Mounting Type:	panel mount
Dimensions:	482.6 x 177.8 x 54 mm, 19" x 7" x 2.125"
Weight:	1600 g
Operating Temperature:	-40 °C to +90 °C, -40 °F to +194 °F
Front Panel Material:	aluminium

Specification Trackball

Ball Diameter:	38 mm / 1.5"
Actuation Force :	50 g
Trackball Lifetime:	> 6 mil. revolutions
Protection Level	IP65 static; IP54 dynamic; NEMA 3 (frontside)

Cat.-No.	Product Name	
KS08308	TKS-105a-TB38-MODUL-PS/2-US	38 mm / 1,5" Trackb.; PS/2; US-Layout
KS09498	TKS-105a-TB38-MODUL-USB-US	38 mm / 1,5" Trackb.; USB; US-Layout
KY02000	TKS-105a-MODUL-SCHABLONE	Template
Other language versions/interfaces/configuration available on request		

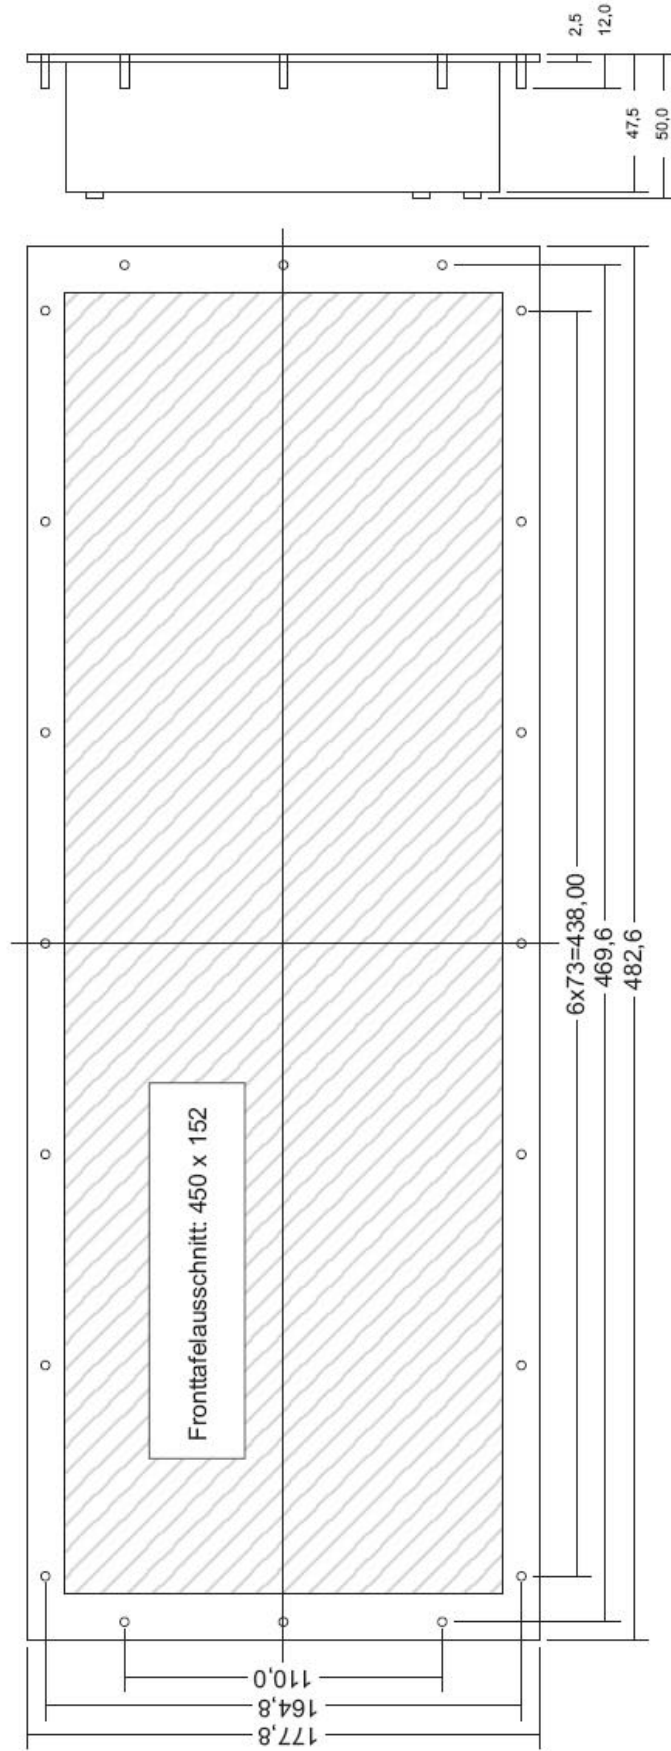

Toleranzen: DIN ISO 2768 T1-m
Abmessungen in mm